

CASTILE


ARCHITECTURAL SURFACES

TILE BOOK EDITION 2026

Official Specifier Catalog & Technical Architectural Guide. Curated porcelain, large format slabs, and artisan ceramic surfaces manufactured in Spain and Italy.

CASTILE USA SPECIFIER ARCHIVE
COMMERCIAL & RESIDENTIAL SURFACES

VOL. 2026 // US

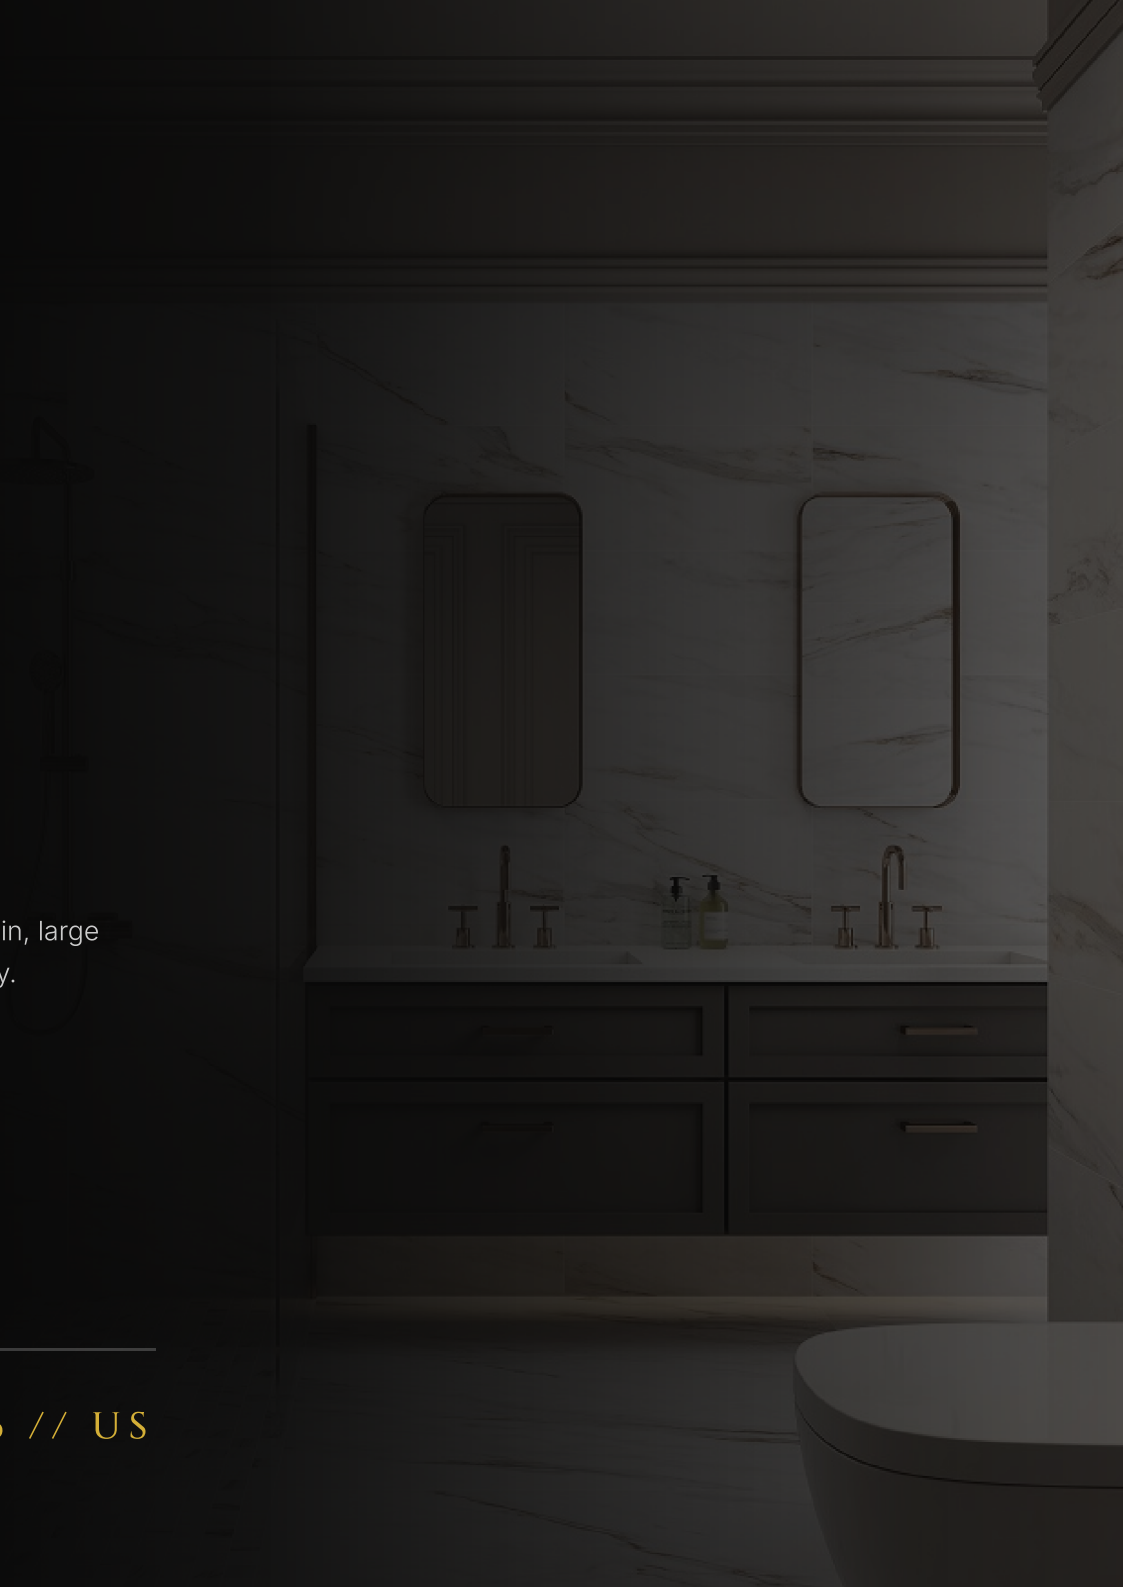

COLLECTION INDEX (A–Z)

CASTILE ARCHITECTURAL TILE BOOK 2026

21 ARCHITECTURAL COLLECTIONS

ABACO CONTEMPORARY CONCRETE	P. 03	ABBEY WOOD PORCELAIN	P. 04	ARTESANO ARTISAN WALL & DECO	P. 05
AURA ARTISAN WALL & DECO	P. 06	AVALON NATURAL STONE	P. 07	BALTIC NATURAL STONE	P. 08
BIANCO VENATINO MARBLE LOOKS	P. 09	BOHEME WOOD PORCELAIN	P. 10	BRICKELL ARTISAN WALL & DECO	P. 11
CALACATA GOLD MARBLE LOOKS	P. 12	HAVANA ARTISAN WALL & DECO	P. 13	JEWELS MARBLE LOOKS	P. 14
JUNE CONTEMPORARY CONCRETE	P. 15	LAGOM WOOD PORCELAIN	P. 16	LASSA MARBLE LOOKS	P. 17
NOLITA CONTEMPORARY CONCRETE	P. 18	PAVERS 20MM XL SLABS & 20MM PAVERS	P. 19	PRO CONTEMPORARY CONCRETE	P. 20
XL SLABS XL SLABS & 20MM PAVERS	P. 21	ZELLIGE ARTISAN WALL & DECO	P. 22	ZEN NATURAL STONE	P. 23



V2 SLIGHT



IN&OUT MICRO-TEXTURE

SEAMLESS TERRACE TRANSITION

ABACO

CASTELLÓN, SPAIN
GLAZED PORCELAIN • IN&OUT SURFACE
TECH

ARCHITECTURAL BASALT & MICRO-CEMENT SURFACE

"Engineered with Castile In&Out slip-resistant technology. Transitions seamlessly from open-concept interior lofts to rain-swept pool terraces with velvety touch and zero maintenance."

COLOR PALETTE & AVAILABLE FINISHES



ARENA
IN&OUT MATTE
FWM7M57371



GRIS
IN&OUT MATTE
FWM7M57021



GRAFITO
IN&OUT MATTE
FWM7M57101

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT IN&OUT	9 mm	3	23.25 sqft	78.4 lbs	28
12" x 24"	STANDARD FIELD IN&OUT	9 mm	8	19.38 sqft	72.0 lbs	32

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.50 (In&Out)	≤ 0.08%	Immune	Class A	≥ 2200 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

INDOOR LIVING

OUTDOOR TERRACES

HEAVY COMMERCIAL

POOL SURROUNDS

COMMERCIAL LOBBIES

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3



V3 MODERATE

ABBEY

CASTELLÓN, SPAIN
GLAZED COLOR BODY PORCELAIN • EMBOSSED
GRAIN

RECLAIMED EUROPEAN OAK NATURAL GRAIN

"Authentic French oak wood grain without the maintenance. Completely immune to water, scratching, and fading—delivering timber warmth into master baths, kitchens, and sun decks."

COLOR PALETTE & AVAILABLE FINISHES



FRESNO
MATTE
NATURAL
FN87UFP831



GRIS
MATTE
NATURAL
FN87UFP021



VISON
MATTE
NATURAL
FN87UFP141



ROBLE
MATTE
NATURAL
FN80A60741

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
8" x 48"	ARCHITECTURAL WOOD PLANK	9.5 mm	7	20.13 sqft	74.2 lbs	36
12" x 36" 3D	SCULPTED 3D RELIEF WALL	10 mm	5	14.53 sqft	51.0 lbs	40

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.42 / ≥ 0.60 (ABS)	≤ 0.1%	Immune	Class A	≥ 2100 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

RESIDENTIAL FLOOR & WALL

POOL TERRACES

HIGH TRAFFIC COMMERCIAL

RADIANT HEATING

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3



SYNCHRONIZED WOOD GRAIN

SCULPTED 3D WALL RELIEF

MICRO-BEVELED ARCHITECTURAL SUBWAY TILE

"Refined 3"x12" subway format with micro-beveled edges and silky satin glaze. Unlocks versatile herringbone, stacked, and vertical chevron layouts for modern culinary and bath spaces."

COLOR PALETTE & AVAILABLE FINISHES



**WHITE
ICE
BRIGHT
GLOSS**
UARWHIBG312



**WHITE
ICE
MATTE
SATIN
VELVET**
UARWHIMG312



**NEU
GRAY
BRIGHT
GLOSS**
UARNEUBG312



**BLACK
NOIR
BRIGHT
GLOSS**
UARBLABG312

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
3" x 12" Field	BEVELED SUBWAY FIELD	8.5 mm	44	12.64 sqft	36.8 lbs	48
3" x 12" Bullnose	FINISHED EDGE TRIM	8.5 mm	24	Trim Unit	18.0 lbs	60

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
Wall Grade	≤ 3.0%	Indoor Wall	Class GA	≥ 600 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

MASTER BATH WALLS

KITCHEN BACKSPASHES

SHOWER ENCLOSURES

BOUTIQUE HOSPITALITY

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3



MICRO-BEVELED EDGE PROFILE

HERRINGBONE WALL PATTERN



V2 SLIGHT

AURA

VALENCIA, SPAIN
CERAMIC WALL TILE • LUMINOUS
GLAZE

LUMINESCENT COASTAL CERAMIC WALL TILES

"Mediterranean coastal tranquility with soft pastels and lustrous glaze that catches morning daylight. Elongates bathroom walls with effortless boutique elegance."

COLOR PALETTE & AVAILABLE FINISHES



SEASHELL
LUMINOUS GLOSS
UAURABG312V



OCEAN BLUE
LUMINOUS GLOSS
UAURABG312C



AQUAMARINE
LUMINOUS GLOSS
UAURABG312S

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
4" x 12"	COASTAL SUBWAY WALL	8.5 mm	34	11.51 sqft	33.2 lbs	54

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
Wall Only	≤ 3.0%	Indoor Wall	Class GA	≥ 600 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

SHOWER WALLS

POWDER ROOMS

KITCHEN BACKSPLASHES

BOUTIQUE SPAS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3



LUSTROUS COASTAL GLAZE

VERTICAL WALL LAYOUT



V2 SLIGHT

AVALON

CASTELLÓN, SPAIN
COLOR BODY PORCELAIN • RECTIFIED EDGE

LIMESTONE & WARM CALCITE PORCELAIN

"Understated serenity of French limestone with authentic fossil veining across full modular sizes up to grand 48"x48" architectural slabs."

COLOR PALETTE & AVAILABLE FINISHES



BLANCO
HONED NATURAL
F106B57011



ARENA
HONED NATURAL
F106A57371

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
48" x 48"	MONUMENTAL LARGE FORMAT	9.5 mm	2	31.00 sqft	116 lbs	20
24" x 48"	LARGE FORMAT FIELD	9 mm	2	15.50 sqft	64.5 lbs	32
24" x 24"	STANDARD FIELD	9 mm	3	11.63 sqft	48.2 lbs	40
12" x 24"	STANDARD FIELD	9 mm	7	17.44 sqft	65.0 lbs	36

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.42	≤ 0.1%	Immune	Class A	≥ 2200 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

ALL RESIDENTIAL


COMMERCIAL HOSPITALITY

BATHROOMS & SPAS

EXTERIOR CLADDING

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3

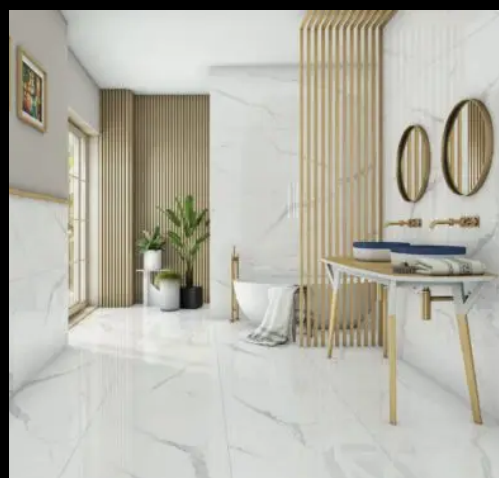

HONED LIMESTONE TEXTURE

GRAND 48"X48" FLOOR GRID



V3 MODERATE

BALTIC

CASTELLÓN, SPAIN
TECHNICAL COLOR BODY PORCELAIN •
FLAMED TEXTURE

NORDIC QUARTZITE & FLAMED GRANITE PORCELAIN

"Monolithic architectural strength inspired by Baltic bedrock. Micro-crystalline textures provide heavy-duty commercial durability while maintaining sleek minimalist elegance."

COLOR PALETTE & AVAILABLE FINISHES



GRANITE
FLAMED MATTE
UBALTIM6HI



SAND
FLAMED MATTE
UBALTIM6HU



TAN
FLAMED MATTE
UBALTIM6HE

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT ARCHITECTURAL	9 mm	2	15.38 sqft	65.0 lbs	32
12" x 24"	STANDARD MODULAR FIELD	9 mm	7	13.37 sqft	54.2 lbs	40

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.42	≤ 0.05%	Immune	Class A	≥ 2400 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

HEAVY COMMERCIAL

RESIDENTIAL MASTER EN-SUITE

EXTERIOR CLADDING

HIGH TRAFFIC PLAZAS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3



FLAMED QUARTZITE RELIEF



MODULAR FIELD INSTALLATION



V2 SLIGHT

BIANCO VENATINO

CASTELLÓN & SASSUOLO
GLAZED COLOR BODY PORCELAIN •
RECTIFIED EDGE

CLASSIC CARRARA WHITE MARBLE
INTERPRETATION

"Timeless Carrara marble elegance woven with subtle grey feathering. Delivers understated purity and light into expansive luxury master suites and culinary countertops."

COLOR PALETTE & AVAILABLE FINISHES



BIANCO POLISHED
MIRROR POLISHED
BV-2448-P0



BIANCO MATTE
VELVET SATIN
BV-2448-MT

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT	9 mm	2	15.50 sqft	64.5 lbs	32
24" x 24"	STANDARD FIELD	9 mm	3	11.63 sqft	48.2 lbs	40
12" x 24"	STANDARD FIELD	9 mm	8	19.38 sqft	72.0 lbs	32

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.42 (Matte)	≤ 0.1%	Immune	Class A	≥ 2000 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

RESIDENTIAL FLOOR & WALL

BATHROOMS & SPAS

COMMERCIAL LOBBIES

FEATURE FIREPLACES

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3



FEATHERED CARRARA GRAIN

POLISHED MIRROR REFLECTION



V2 SLIGHT

BOHEME

CASTELLÓN, SPAIN
GLAZED PORCELAIN • ULTRA-HD MICRO
TEXTURE

SCANDI NATURAL OAK & WALNUT
CHEVRON

"Harmonious Parisian parquet charm and Scandinavian clarity. Silken natural touch engineered specifically for continuous flooring and underfloor heating systems."

COLOR PALETTE & AVAILABLE FINISHES



WHITE OAK
NATURAL SILKEN
BOH-WHI-835



NATURAL
NATURAL SILKEN
BOH-NAT-835



WALNUT
NATURAL SILKEN
BOH-WAL-835

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
8" x 35"	ARCHITECTURAL PLANK	9 mm	6	14.53 sqft	58.0 lbs	42

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.45	≤ 0.1%	Immune	Class A	≥ 2000 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

OPEN PLAN LIVING

BEDROOMS & SUITES

BOUTIQUE COMMERCIAL

UNDERFLOOR HEATING

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3

V3 MODERATE

BRICKELL

VALENCIA, SPAIN
RAKED RELIEF CERAMIC WALL TILE

URBAN ARCHITECTURAL GLAZED BRICK TILES

"Brings industrial loft character and rich tactile shading into contemporary residences. Ideal for fireplace surrounds, kitchen splashbacks, and wine cellar alcoves."

COLOR PALETTE & AVAILABLE FINISHES



BLANCO
RAKED
MATTE
BRK-BLA-
312



GRIS
RAKED
MATTE
BRK-GRI-
312



BURNT
RAKED
MATTE
BRK-BRN-
312



ANTRACITA
RAKED
MATTE
BRK-ANT-312

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
3" x 12"	URBAN BRICK FIELD	8.5 mm	44	12.64 sqft	36.8 lbs	48

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
Wall Grade	≤ 3.0%	Indoor Wall	Class GA	≥ 600 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

FIREPLACE SURROUNDS


BAR FRONTS

KITCHEN SPLASHES

WINE CELLARS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3

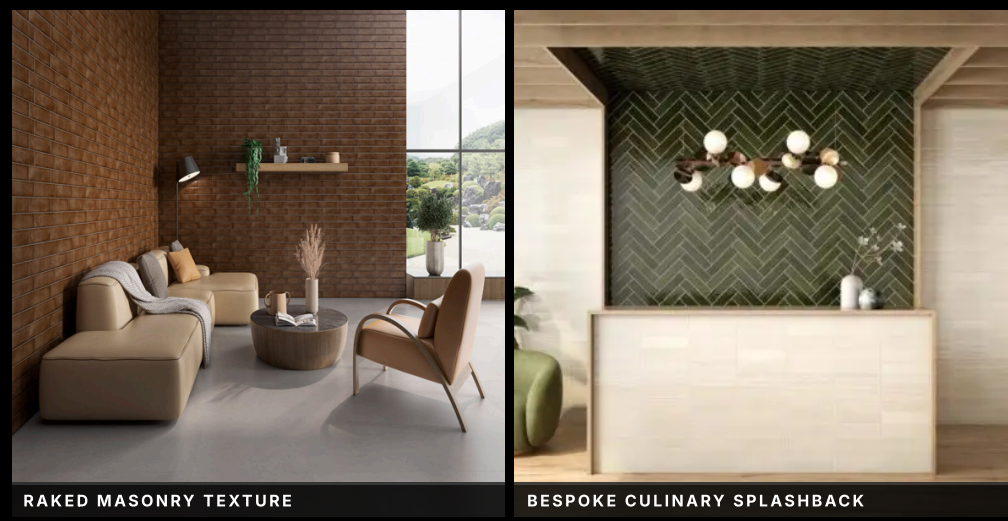

RAKED MASONRY TEXTURE

BESPOKE CULINARY SPLASHBACK



V3 MODERATE

CALACATA GOLD

CASTELLÓN, SPAIN & SASSUOLO, ITALY

PRECIOUS ITALIAN APUAN MARBLE
INTERPRETATION

GLAZED COLOR BODY PORCELAIN •
RECTIFIED EDGE

"The pinnacle of Apuan marble luxury. Captures pure crystalline light with warm golden and smoky veins to impart prestige into grand living spaces, master spas, and commercial lobbies."

COLOR PALETTE & AVAILABLE FINISHES



GOLD POLISHED
POLISHED MIRROR
CG-2448-P0



GOLD SATIN MATTE
SATIN VELVET
CG-2448-MT

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT FLOOR & WALL	9 mm	2	15.50 sqft	64.5 lbs	32
24" x 24"	STANDARD FIELD TILE	9 mm	3	11.63 sqft	48.2 lbs	40
12" x 24"	STANDARD FIELD TILE	9 mm	8	19.38 sqft	72.0 lbs	32
3" x 12"	SUBWAY WALL TILE	8.5 mm	44	12.64 sqft	38.0 lbs	48

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.42 (Matte)	≤ 0.1%	Immune	Class A	≥ 2000 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

RESIDENTIAL FLOOR

COMMERCIAL FLOOR

INTERIOR WALL

SHOWER & WET AREAS

FIREPLACES

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3



BOOKMATCHED SPA WALL

VEIN CONTINUITY & POLISH

V3 MODERATE

HAVANA

VALENCIA, SPAIN
GLAZED PORCELAIN DECO • HIGH TRAFFIC
ENAMEL

RETRO CEMENTINE & GEOMETRIC PATTERN DECO

"Colonial Caribbean heritage and European geometric cementine artistry. Introduces captivating graphic rhythm into sunrooms, boutique cafes, and foyer entryways."

COLOR PALETTE & AVAILABLE FINISHES



RETRO MIX
CEMENTINE MATTE
HAV-MIX-88



SPICE TERRA
CEMENTINE MATTE
HAV-SPI-88

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
8" x 8"	ARTISAN SQUARE FIELD	8.5 mm	25	11.10 sqft	38.5 lbs	60

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.42	≤ 0.5%	Immune	Class GA	≥ 1200 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

DECORATIVE FLOORS

KITCHEN FLOORS

COMMERCIAL CAFE ZONES

POWDER ROOMS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3



GEOMETRIC CEMENTINE PATTERN

MATTE ENAMEL TILE DETAIL

JEWELS

CASTELLÓN & SASSUOLO
FULL BODY PORCELAIN • RECTIFIED MIRROR
POLISH

DRAMATIC ONYX & EXOTIC DARK
MARBLES

"Exotic, high-contrast dark marble and onyx veining for theatrical interior statements. Creates unforgettable powder rooms, executive cocktail lounges, and fireplace surrounds."

COLOR PALETTE & AVAILABLE FINISHES



MAURICE BLACK
MIRROR POLISHED
JWL-MAU-2448



RAY ONYX
SILK TOUCH MATTE
JWL-ONY-2448

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT LUXURY	9 mm	2	15.50 sqft	64.5 lbs	32
48" x 48"	GRAND SQUARE FORMAT	9 mm	2	31.00 sqft	116 lbs	20

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.42 (Matte)	≤ 0.05%	Immune	Class A	≥ 2400 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

FEATURE WALLS

LUXURY BATHROOMS

BOUTIQUE HOSPITALITY

FIREPLACE ACCENTS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3



MAURICE BLACK MIRROR POLISH



BOOKMATCHED ONYX INSET

V2 SLIGHT

JUNE

CASTELLÓN, SPAIN
COLOR BODY PORCELAIN • RECTIFIED
EDGESUBTLE ARCHITECTURAL MICRO-TERRAZZO &
CEMENT

"Minimalist concrete with delicate micro-aggregate mineral flecks. Offers understated architectural depth across wide-format floor plans and modern commercial envelopes."

COLOR PALETTE & AVAILABLE FINISHES

**BLANCO**
VELVET MATTE
JUN-BLA-2448**ACERO**
VELVET MATTE
JUN-ACE-2448

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT FIELD	9 mm	2	15.50 sqft	64.5 lbs	32
24" x 24"	STANDARD FIELD TILE	9 mm	3	11.63 sqft	48.2 lbs	40

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.45	≤ 0.1%	Immune	Class A	≥ 2100 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

COMMERCIAL PLAZAS

RESIDENTIAL LIVING

MODERN BATHROOMS

KITCHENS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3



V2 SLIGHT

LAGOM

CASTELLÓN, SPAIN
GLAZED PORCELAIN • ULTRA-HD
PRINT

EXTRA-LONG 63" SCANDINAVIAN TIMBER PLANKS

"Grand 10" x 63" architectural timber planks capturing the Swedish philosophy of balanced living. Creates serene continuous grain flow across expansive living areas."

COLOR PALETTE & AVAILABLE FINISHES



NATURAL
SILKEN NATURAL
LAG-NAT-1063



ROBLE
SILKEN NATURAL
LAG-ROB-1063

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
10" x 63"	GRAND ARCHITECTURAL PLANK	9.5 mm	4	17.44 sqft	68.0 lbs	36
8" x 48"	STANDARD ARCHITECTURAL PLANK	9.5 mm	7	20.13 sqft	74.2 lbs	36

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.45	≤ 0.1%	Immune	Class A	≥ 2200 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

CONTINUOUS LIVING FLOORS

MASTER SUITES

COMMERCIAL BOUTIQUES

HEATED FLOORS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3



GRAND 63" TIMBER SCALE

SILKEN WOOD RELIEF



V2 SLIGHT



LINEAR CRYSTALLINE STRATA



MIRROR POLISH SPA WALL

LASSA

CASTELLÓN & SASSUOLO
COLOR BODY PORCELAIN • RECTIFIED
EDGE

LINEAR CRYSTALLINE GREEK WHITE MARBLE

"Pristine Greek Thassos marble character with subtle linear grey crystalline bands. Imparts serene light and neoclassical sophistication into spa bathrooms and modern villas."

COLOR PALETTE & AVAILABLE FINISHES



LASSA POLISHED
MIRROR POLISHED
LAS-2448-P0



LASSA MATTE
VELVET SATIN
LAS-2448-MT

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT	9 mm	2	15.50 sqft	64.5 lbs	32
24" x 24"	STANDARD FIELD	9 mm	3	11.63 sqft	48.2 lbs	40

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.42 (Matte)	≤ 0.05%	Immune	Class A	≥ 2000 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

LUXURY MASTER BATHS

LIVING SUITES

COMMERCIAL FOYERS

VANITY WALLS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3



V2 SLIGHT



NOLITA

CASTELLÓN, SPAIN
GLAZED PORCELAIN • RECTIFIED
EDGE

MANHATTAN INDUSTRIAL CONCRETE & PLASTER

"Raw urban plaster character inspired by New York's historic industrial districts. Offers tactile warmth, soft mottling, and commercial durability."

COLOR PALETTE & AVAILABLE FINISHES



WHITE
PLASTER MATTE
NOL-WHI-2448



GRAY
PLASTER MATTE
NOL-GRA-2448



ANTHRACITE
PLASTER MATTE
NOL-ANT-2448

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT	9 mm	2	15.50 sqft	64.5 lbs	32
12" x 24"	STANDARD FIELD	9 mm	8	19.38 sqft	72.0 lbs	32

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.45	≤ 0.1%	Immune	Class A	≥ 2000 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

LOFTS & RESIDENCES

COMMERCIAL DINING

BOUTIQUE RETAIL

FEATURE KITCHENS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3



V3 MODERATE

PAVERS 20MM

CASTELLÓN, SPAIN
20MM MONOLITHIC HEAVY-DUTY
PORCELAIN

MONOLITHIC EXTERIOR PORCELAIN PAVER SYSTEMS

"Extra-thick 20mm structural porcelain engineered for dry-lay on grass, gravel, and elevated rooftop pedestals. Immune to salt, chlorine, frost, and vehicular weights."

COLOR PALETTE & AVAILABLE FINISHES



EVOLVE GRAY
GRIP ABS R11
PAV-EV0-2424



CORTONA BEIGE
GRIP ABS R11
PAV-C0R-2424

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 24" x 20mm	SQUARE OUTDOOR PAVER	20 mm (0.78")	2	7.75 sqft	72.0 lbs	30
24" x 36" x 20mm	RECTANGLE OUTDOOR PAVER	20 mm (0.78")	2	11.63 sqft	108 lbs	20

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.65 (Wet High Grip)	≤ 0.05%	Immune (-50°C to +80°C)	Class A	≥ 10,000 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

POOL DECKS

PEDESTAL ROOFTOPS

DRIVEWAYS & PATIOS

COMMERCIAL PLAZAS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3



GRIP ABS R11 TRACTION

DRY-LAY PEDESTAL SYSTEM



PRO

CASTELLÓN, SPAIN
FULL MASS TECHNICAL PORCELAIN •
THROUGH-BODY

HEAVY-DUTY TECHNICAL COMMERCIAL PORCELAIN

"High-performance technical color-body porcelain engineered for extreme commercial foot traffic, airport concourses, and minimalist residential flooring."

COLOR PALETTE & AVAILABLE FINISHES



OFF WHITE
TECHNICAL MATTE
PRO-WHI-2448



LIGHT GRAY
TECHNICAL MATTE
PRO-LGR-2448

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT	9.5 mm	2	15.50 sqft	64.5 lbs	32
24" x 24"	STANDARD FIELD	9.5 mm	3	11.63 sqft	48.2 lbs	40

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.50	≤ 0.05%	Immune	Class A	≥ 2500 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

HIGH-TRAFFIC COMMERCIAL

CORPORATE LOBBIES

MODERN HOMES

AIRPORTS & RAIL

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3

XL SLABS

MONUMENTAL SINTERED CONTINUOUS PORCELAIN SURFACES

CASTELLÓN, SPAIN &
SASSUOLO, ITALY
CONTINUOUS SINTERED COMPACT
PORCELAIN

"Monumental continuous surfaces up to 63" x 126" that eliminate grout lines entirely across shower walls, kitchen waterfall islands, and architectural feature elements."

COLOR PALETTE & AVAILABLE FINISHES



**CARRARA
STATUARIO**
POLISHED MIRROR
SLAB-CAR-63126



SAHARA NOIR
SILK TOUCH MATTE
SLAB-SAH-63126



CALACATA ORO
POLISHED MIRROR
SLAB-CAL-63126

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
63" x 126"	MONUMENTAL GRAND SLAB	6 mm & 12 mm	1 Slab	55.12 sqft	165 lbs	A-Frame Crate
48" x 110"	GRAND SLAB WALL HEIGHT	6 mm	1 Slab	36.16 sqft	110 lbs	A-Frame Crate
48" x 48"	LARGE FORMAT FLOOR/WALL	9 mm	2	31.00 sqft	118 lbs	20

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.42 (Matte)	≤ 0.05%	Immune	Class A	≥ 3500 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

CONTINUOUS WALL SLABS


KITCHEN WATERFALL ISLANDS

VANITY ENVELOPES

FIREPLACE ACCENTS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3

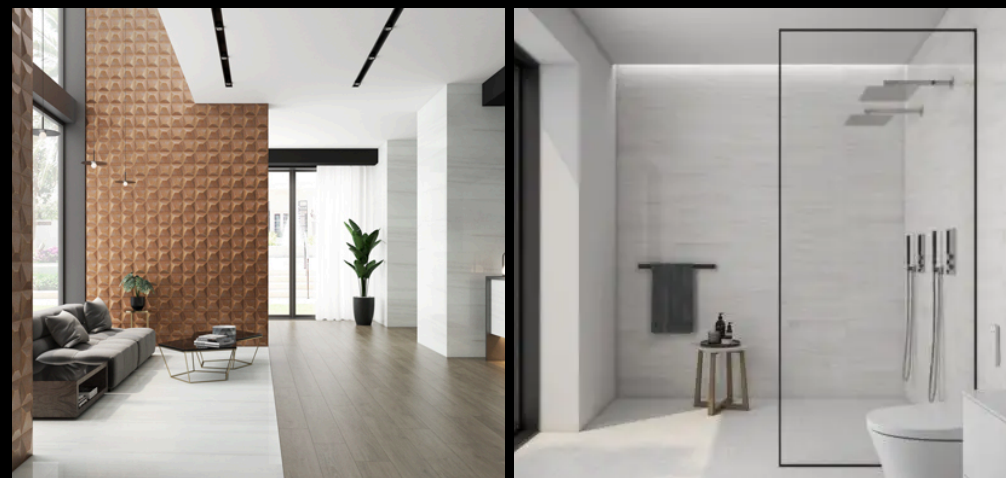

BOOKMATCHED SLAB ISLAND

MONOLITHIC SHOWER ENVELOPE

V4 SUBSTANTIAL

ZELLIGE

VALENCIA, SPAIN
ARTISAN WHITE BODY CERAMIC WALL
TILE

HANDCRAFTED VITREOUS CERAMIC WALL TILES

"Authentic undulating relief and rich vitreous glazes that reflect daylight with organic warmth. Adds unmistakable soul to designer backsplashes, wet bars, and bespoke shower sanctuaries."

COLOR PALETTE & AVAILABLE FINISHES



WHITE GLAZE
VITREOUS GLOSS
ZEL-WHI-216



TENDER GRAY
VITREOUS GLOSS
ZEL-TGR-216



EMERALD GREEN
LUSTRE GLOSS
ZEL-EMR-216

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
2" x 16"	ARTISAN SUBWAY PLANK	8 mm	34	10.76 sqft	26.4 lbs	64
3/4" x 16"	QUARTER ROUND LINER	8 mm	20	5.40 sqft	12.0 lbs	80

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
Wall Only	≤ 3.0%	Indoor Wall	Class GA	≥ 600 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

KITCHEN BACKSPLASHES

SHOWER ENCLOSURES

HOSPITALITY ACCENT WALLS

POWDER ROOMS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 / A326.3



UNDULATING SURFACE GLAZE



VERTICAL STACK INSTALLATION

V3 MODERATE

ZEN

CASTELLÓN, SPAIN
COLOR BODY PORCELAIN • MICRO-RELIEF

CALMING MINIMALIST QUARTZITE & BASALT

"Organic split-face stone textures and serene earthy tones inspired by Japanese rock gardens. Perfect for meditation pavilions, master shower feature walls, and spa baths."

COLOR PALETTE & AVAILABLE FINISHES



ZEN WHITE
SPLIT-FACE
ZEN-WHI-2448



ZEN SILVER
HONED VELVET
ZEN-SIL-2448

MODULAR FORMATS (INCHES) & PACKAGING SPECIFICATIONS

SIZE (INCHES)	FORMAT TYPE	THICKNESS	PCS / BOX	COVERAGE / BOX	WEIGHT / BOX	BOXES / PALLET
24" x 48"	LARGE FORMAT	9 mm	2	15.50 sqft	64.5 lbs	32
12" x 24"	STANDARD FIELD	9 mm	8	19.38 sqft	72.0 lbs	32

PHYSICAL & MECHANICAL PERFORMANCE STANDARDS

DCOF SLIP	WATER ABSORP.	FROST RESIST.	CHEMICAL RES.	BREAK STRENGTH	STAIN RESIST.
≥ 0.45	≤ 0.05%	Immune	Class A	≥ 2200 N	Class 5

RECOMMENDED ARCHITECTURAL APPLICATIONS

SPA EN-SUITES

OUTDOOR SHOWERS

COMMERCIAL WELLNESS CENTERS

FEATURE WALLS

Specification Note: Rectified porcelain allows 1/16" (1.5mm) grout joint spacing. In&Out tech provides DCOF ≥ 0.50 wet traction.

ANSI A137.1 /
A326.3